


# Model 271 Remote Display/Annunciator

*Radiation Detection for a Safer World*



Ludlum Measurements, Inc.

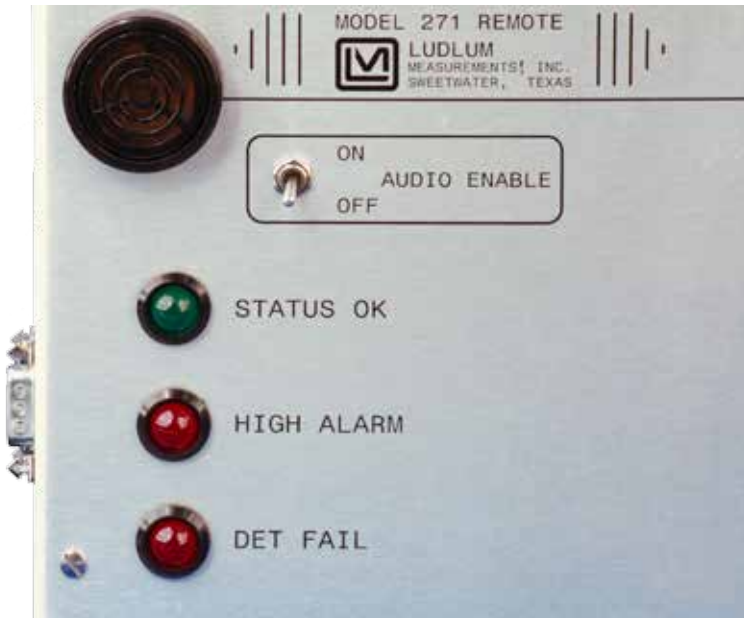

Part No. 48-2475

(front and side views)

## Specifications

INDICATED USE: remote display/annunciator for the Model 375 series of Area Monitors

AUDIO: sonalert-type speaker (greater than 68 dB at 0.61 m [2 ft]) with enable/disable switch

RADIATION READOUT DISPLAY: none

STATUS INDICATORS:

STATUS OK: green LED

HIGH ALARM: red LED

DET FAIL: red LED

CONTROLS:

AUDIO: On/Off

REMOTE ALARM RELAY: Enable/Disable

POWER SUPPLIED BY: Model 375 instrument, 6.1 m (20 ft) cable provided (additional lengths available)

CONNECTOR: 9-pin "D" connector

CONSTRUCTION: aluminum with ivory powder coat

TEMPERATURE RANGE: -20 to 50 °C (-4 to 122 °F), may be certified to operate from -40 to 65 °C (-40 to 150 °F)

SIZE: 17.8 x 5.1 x 5.1 cm (7 x 2 x 2 in.) (H x W x D)

WEIGHT: 0.7 kg (1.5 lb)

## Alternate Instruments

Model 271-2: dual channel remote display for Model 375 series Digital Area Monitors (Part No. 48-3536)

Model 272: remote display/annunciator area monitor with analog meter dial, for the Model 375 series Digital Area Monitors, CE Certified (Part No. 48-2656)

Model 272D: digital remote display/annunciator area monitor for the Model 375 series Digital Area Monitors, CE Certified (Part No. 48-3575)