

Model 2100-1 Sample Counter



Ludlum Measurements, Inc.

Features

- High Sensitivity Gamma Detector
- Separate High & Low Gamma Energy Sampling
- User-Adjustable Parameters
- Color LCD Touch Screen
- Ethernet Connectivity
- Remote Alarm Output
- USB Ports for ID Input Devices

Introduction

The Model 2100-1 manually operated sample counting system processes sample steel slugs to determine whether any radioactive impurities exist. The gamma radiation counting system is a table-mounted, fully integrated design that includes a gamma detector, sample tray, and controller.

The counting electronics incorporates two channels to distinguish between low and high energy gamma isotopes. All parameters, such as alarm point and count time are user-adjustable from the front panel LCD touch screen via a simple menu selection.

Measurement results for each sample are displayed on the backlit LCD. An Ethernet port reports all results and system status in real time for remote data logging and alarm annunciation. Visual and audible alarms are annunciated via the system's LCD and rear panel mounted buzzer respectively. A built-in relay provides a method for driving an external horn/strobe (available as an option). Ludlum also offers an optional Ethernet-based Model 272E remote display for conveniently displaying of one or more sample counters.

One rear panel mounted USB port enables connection to either a keyboard or barcode reader device for the purpose of entering sample ID's.



Part Number: 48-3781





Ludlum Measurements, Inc. P.O. Box 810, Sweetwater, Texas 79556

Web: <http://www.ludlums.com> Tel: 800-622-0828 / 325-235-5494 / Fax: 325-235-4672 / Email: ludlum@ludlums.com

Note: specifications subject to change without notification. We are not responsible for errors or omissions.

April 2012

Radiological Setup

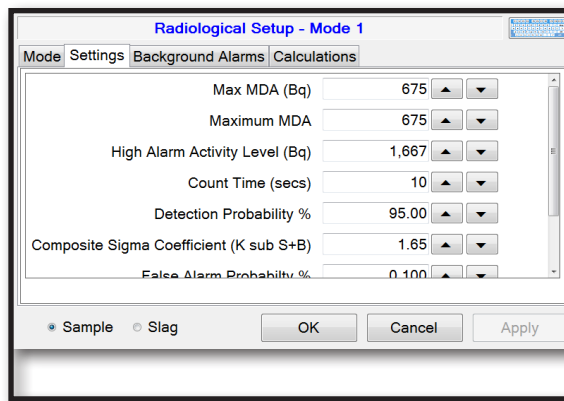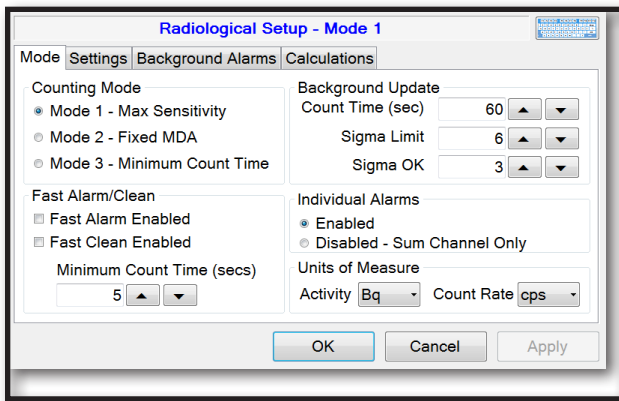

Setup screens allow configuring the instrument to best suit each particular sites criteria. Three different counting modes are offered to either:

- Maximize the sensitivity
- Fix the MDA (Minimum Detectable Activity)
- Automatically adjust counting cycles to the minimum count time possible

Other parameters facilitate configuring alarms, background updates, units of measurements etc.

Specifications

DETECTOR: 5.1 x 5.1 cm (2 x 2 in.) NaI (sodium iodide)

ENERGY RESPONSE: 30 keV to 3 MeV

SENSITIVITY: 0.1 Bq/g in less than three minutes (standard 100 gram sample) (^{60}Co)

LEAD SHIELDING: internal lead shielding of 3.8 cm (1.5 in.) surrounds the detector chamber

BACKGROUND: approximately 1200 cpm in the sum channel

SAMPLE TRAY: chrome-plated brass sample tray capable of holding a 6.5 cm (2.5 in.) diameter sample up to 1.3 cm (0.5 in.) thick

DETECTOR CHAMBER: 7.13 cm (2.75 x 0.5 in.) (D x H)

AUDIBLE BUZZER: 68 dB at 61 cm (2 ft)

POWER: 95-150 VAC, 50/60 Hz, 120 W

SIZE: 36.8 x 27.9 x 48.3 cm (14.5 x 11 x 19 in.) (H x W x L)

WEIGHT: approximately 24.9 kg (55 lb)

Options

Model 272E

Remote Display Monitor provides current status of the Model 2100 series instrument via Ethernet connection. The Model 272E has a 1/4 VGA LCD and audio alarm.
(Part Number 4396-1081)

Calibration Source

Calibrated 0.1 Bq/g (10 Bq) simulated ^{60}Co radiation source
(Part Number 2433-50)



Alternate Instrument

Model 2100

Identical to the Model 2100-1, but utilizes a conveyor for automated sample counting.
(Part Number 48-3780)



Ludlum Measurements, Inc.

Ludlum Measurements, Inc. P.O. Box 810, Sweetwater, Texas 79556

Web: <http://www.ludlums.com> Tel: 800-622-0828 / 325-235-5494 / Fax: 325-235-4672 / Email: ludlum@ludlums.com

Note: specifications subject to change without notification. We are not responsible for errors or omissions.