

Model 375P-336-1 Waste Release Monitor



Ludlum Measurements, Inc.

Features

- Weatherproof Detector Enclosures for Outdoor Applications
- Affordable Digital Controller
- 2 Plastic Scintillation Detectors
- Programmable Alarms
- Network-able
- Includes Check Source for Calibration
- 24-Hour Battery Backup

Introduction

The Model 375P-336-1 is a digital Model 375 Controller coupled to two 2752 cm³ (168 in³) plastic scintillation detectors. The detectors are housed in weatherproof enclosures that can be mounted outdoors. The Model 375 Controller is not weatherproof and must be mounted either indoors or within an environmental enclosure (available separately, see Options). This simple and cost-effective solution is easy to operate and maintain. A 24-hour battery backup ensures operation in the event of loss of external power. The controller supplies local alarms, but it may also be connected to external alarms or put onto an Ethernet network, if desired (with optional accessories).



Part Number: 48-3535

Specifications

DETECTOR: 2 ea. 2752 cm³ (168 in³) plastic scintillation detectors in weatherproof enclosures. Each detector is supplied with a 15.2 m (50 ft) coaxial cable.

RANGE: 0.0–9999 kcps

LINEARITY: reading within 10% of true value

RESPONSE: typically 3 seconds from 10% to 90% of final reading

DISPLAY: 4-digit LED display with 2 cm (0.8 in.) digits

DISPLAY UNITS: can be made to display in $\mu\text{Sv/h}$, mSv/h , Sv/h , $\mu\text{R/hr}$, mR/hr , R/hr , $\mu\text{rem/hr}$, mrem/hr , rem/hr , cpm , cps , and others

STATUS: (green light) instrument functioning properly

SIGMA ALARM: (red ALARM light and audible tone) can be set at any point from 0.0–999 sigma

SUM ALARM: (red ALARM light and audible tone) can be set at any point from 0.0–9999 kcps.

NOTE: audible alarm annunciators can be configured as a single beep if desired

DET FAIL: (red light and audible tone) indicates no counts from detector or instrument failure

LOW BAT: (yellow) indicates less than 2 hours of battery power remaining

OVERRANGE: (“----”) indicates radiation field exceeds counting range of instrument

RELAY OUTPUT: mains (120 or 240 Vac) output on alarm, 9-pin connector providing RS-232 output, signal ground connection, FAIL and ALARM signals (current sink), and direct connection to battery and ground

CALIBRATION CONTROLS: accessible from front of instrument (protective cover provided)

POWER: 95-135 Vac (178–240 Vac available), 50–60 Hz, 6-volt sealed lead-acid rechargeable battery (built-in)

BATTERY LIFE: typically 24 hours in non-alarm condition

BATTERY CHARGER: battery is continuously trickle-charged when instrument is connected to line power and turned on

CONSTRUCTION (electronics): aluminum housing with ivory powder-coat

TEMPERATURE RANGE: -15 to 50 °C (5 to 122 °F)

SIZE: Electronics: 26.2 x 24.6 x 8.4 cm (10.3 x 9.7 x 3.3 in.);

Detectors (ea.): 104.1 x 17.1 x 5.4 cm (41 x 6.75 x 2.125 in.)


WEIGHT: Electronics: 4.2 kg (9.3 lb); Detectors (ea.): 10.7 kg (23.5 lb)

OPTIONS: Date/Time Printer with Cable (Part Number 4396-072) (shown)

External Enunciator Option for the Model 375 (Part Number 4396-171)

Horn/Red Alarm Strobe: Model ALM-220, with 14.2 m (50 ft) cable and 220 V relay (Part Number 4396-173) (shown)

Environmental Enclosure for Model 375 electronics: NEMA 4 Weatherproof Enclosure (Part Number 4396-068)

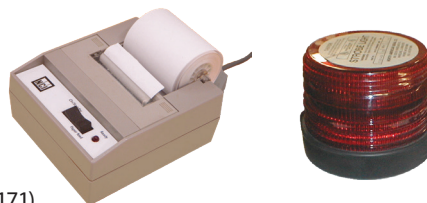

Ludlum Measurements, Inc. P.O. Box 810, Sweetwater, Texas 79556

Web: <http://www.ludlums.com> Tel: 800-622-0828 / 325-235-5494 / Fax: 325-235-4672 / Email: ludlum@ludlums.com

Note: specifications subject to change without notification. We are not responsible for errors or omissions.

July 2018